


## BLUETOOTH CONTROLLABLE DIMMER

Easilite 1.0 is an easy-to-install lighting module that transforms existing lighting into a smart lighting system that is controlled by a smart device through Bluetooth connectivity.

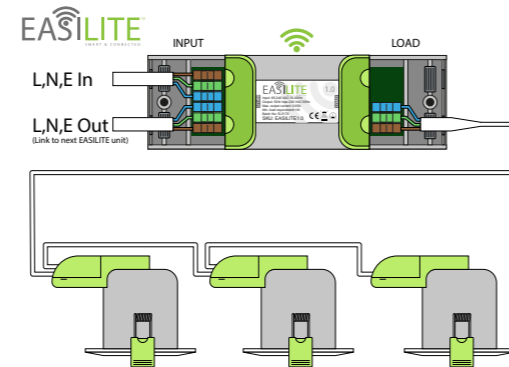

### PRODUCT CODE

EASILITE1.0

### DESCRIPTION

EASILITE BLUETOOTH DIMMER



## THE NUMBERS

### EasiliteV1.0

Dimming method  
Trailing-edge phase control

#### Input

85-240 VAC 50-60 HZ  
0,65 A

#### Output

Incandescent and high voltage halogen bulbs:  
150 W @ 230 V AC  
70 W @ 110 V AC

#### High voltage AC LED modules:

150 W @ 230 V AC  
70 W @ 110 V AC

#### Dimmable LED and CFL bulbs:

50 W @ 230 V AC  
25 W @ 110 V AC

#### Dimmable electronic transformers:

50 W @ 230 V AC  
25 W @ 110 V AC

#### Max. output current:

0,65 A

#### Min. load requirement

1W

#### Max. inrush current

4 A

#### Protection

IP20

### Easilite Network Figures

#### Network Size

127 Modules

#### BLE Range Between Units

30M

#### No# of Networks

Each easilite can only be linked to one network

#### Cross Platforming on Devices

If your family are on either side of the Apple/Andriod fence don't worry the modules can be controlled simultaneously from either device.