


ICE50/B

Ice 50W 5000K IP65 Slimline LED Floodlight Black

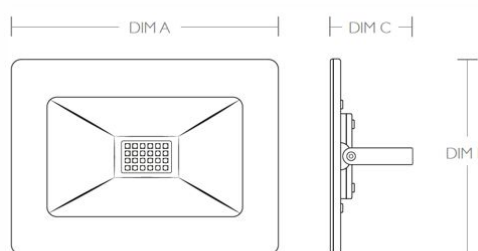

General Details

Finish	Diecast White Frame c/w Toughened Glass Front
Product Weight	2.6kg
Overall Dimensions	250mm x 188mm x 120mm
Carton Weight / Material	2.50 kg / Cardboard
Packaging Sizes / Packed Weight	Length 175mm, Height 120mm, Width 95mm
Packaging & Labelling Guidelines	Saturn LED.eu - Generic labelling
Bar Coding	Saturn LED coding in accordance with EAN-12 & ITF-14
IP Rating	IP65
Energy Rating	A* - (Very Low Energy)

Light Source

Rated Wattage	50W
Lumens	4000
Lumens Per Watt	80
Recommended Product Location	Exterior Flood Lighting
Light Source Brand	Branded LED Chips
Colour Temperature	5000K
CRI Ra	Ra > 70
Lifespan	30,000 Hours
Lamp Working Temperature	<50°C
Beam Angle	120°
Photometric Data	Visit www.saturnled.eu for full Photometric files
Lamp Code	N/A

Electrical

Voltage	220-240V. 50 / 60Hz. AC.
Electrical Classification	Class I
Cabling Electrical Connections	Screw fix in terminal block

Installation

Distance from Illuminated Object	0.5m
Method of Fix	Surface mounted on a suitable substrate.
Recommended Working Temperature	Minimum Temp -10°C to Maximum Temp + 40°C
Instruction Sheet	Supplied with product

Origin & Markets

Country of Manufacture Designed & tested in Europe - Manufactured in China

Intended Market Europe, Middle East & Australia 220 - 240Volt

Materials

Main Housing Material

Approvals

Warranty 3 Year Warranty - For more information go to www.saturnled.eu/warranty

Marks & Symbols CE -- SELV -- RoHS -- EMC -- WEEE

Quality Assurance System SaturnLED quality assurance to ISO9001:2008

Certificate of Conformity Available on request - technical@saturnled.eu

Manufactured in Accordance to British Standard - BS EN 60598 - 2 - 1

Datasheet generated from <http://www.electrika.com> last updated Thursday, February 22, 2018 10:00:07 AM

