


EDGE1002

Edge 150W 5000K IP65 Diecast LED Floodlight

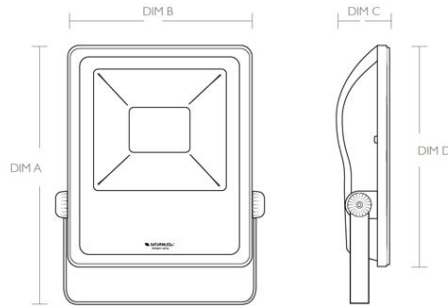

General Details

Finish	Black Die Cast Aluminium with Tempered Glass Face
Product Weight	6.75kg
Overall Dimensions	A 480mm X B 410mm x C 102mm x D 438mm
Bar Coding	Saturn LED coding in accordance with EAN-12 & ITF-14
IP Rating	IP65
Energy Rating	A* - (Very Low Energy)

Light Source

Wattage & Lumens	150W - 15750LM - 105 lm/W
Colour Temperature	5000K
CRI Ra	Ra > 80
Lifespan	50,000 Hours
Lamp Working Temperature	<50°C
Beam Angle	90°



Electrical

Voltage	220-240V. 50 / 60Hz. AC.
Running Current (I)	110mA
Total Running Wattage (W)	150W
Electrical Classification	Class I
Power Factor Correction (PFC)	0.9
Cabling Electrical Connections	Screw fix in terminal block
LED Driver	Meanwell

Installation

Method of Fix	Pole or Wall Mounting
Recommended Working Temperature	Minimum Temp -10°C to Maximum Temp + 40°C
Instruction Sheet	Supplied with product

Origin & Markets

Country of Manufacture	Designed & tested in Europe - Manufactured in China
Intended Market	Europe, Middle East & Australia 220 - 240Volt

Materials

Main Housing Material	Die Cast Aluminium Black Powder Coated Housing
Fixings Main Housing	Zinc plated screws (Internal)
Front Shield	Toughened Glass / Polycarbonate

Approvals

Warranty	5 Year Warranty - For more information go to www.saturnled.eu/warranty
Marks & Symbols	CE -- SELV -- RoHS -- EMC -- WEEE
Quality Assurance System	SaturnLED quality assurance to ISO9001:2008
Manufactured in Accordance to	British Standard - BS EN 60598 - 2 - 1

