


PHO4001

Phoenix 3W 6500K IP20 LED Emergency Wall/Ceiling Mounted Exit Sign

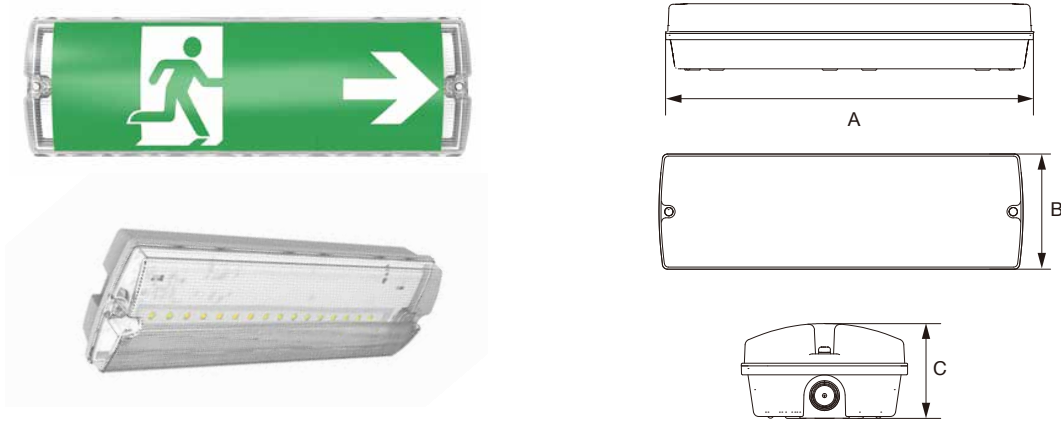

General Details

Finish	Polycarbonate & ABS Base / Polycarbonate Opal Diffuser
Product Weight	0.2kg
Overall Dimensions	A 351mm X B 111mm X C 63mm
Bar Coding	Saturn LED coding in accordance with EAN-12 & ITF-14
IP Rating	IP20
Energy Rating	A* - (Very Low Energy)

Light Source

Wattage & Lumens	3W - 150LM
Colour Temperature	6500K
CRI Ra	Ra > 80
Lifespan	30,000 Hours
Lamp Working Temperature	<50°C
Beam Angle	90°



Electrical

Voltage	220-240V. 50 / 60Hz. AC.
Running Current (I)	0.04A
Total Running Wattage (W)	3W
Electrical Classification	Class II
Power Factor Correction (PFC)	> 0.7
Cabling Electrical Connections	Screw fix in terminal block
Battery	LifeP04 Battery

Installation

Method of Fix	Surface mounted on suitable substrate / Wall or Ceiling
Recommended Working Temperature	Minimum Temp -10°C to Maximum Temp + 40°C
Instruction Sheet	Supplied with product

Origin & Markets

Country of Manufacture	Designed & tested in Europe - Manufactured in China
Intended Market	Europe, Middle East & Australia 220 - 240Volt

Materials

Main Housing Material	Polycarbonate Body & Polycarbonate Legend
Fixings Main Housing	
Front Shield	Clear Polycarbonate Diffuser

Approvals

Warranty	4 Year Product / 2 Year Battery - For more information go to www.saturnled.eu/warranty
Marks & Symbols	CE -- SELV -- RoHS -- EMC -- WEEE
Quality Assurance System	SaturnLED quality assurance to ISO9001:2008
Manufactured in Accordance to	British Standard - BS EN 60598 - 2 - 1



SATURNLED[®]

Simplified

