


TAOTWO

Tao Two 20W Up / 20W Down 4000K IP20 Wall Mounted Office Light

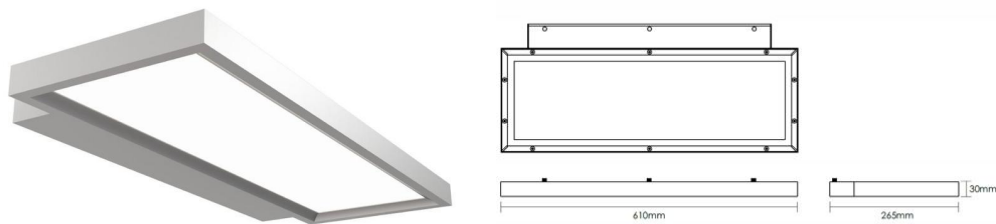

General Details

Finish	Aluminium Housing with Acrylic Diffuser
Product Weight	3.15KG
Overall Dimensions	610mm x 265mm x 30mm
Carton Weight / Material	NEW PRODUCT
Packaging & Labelling Guidelines	Saturn LED.eu - Generic labelling
Bar Coding	Saturn LED coding in accordance with EAN-12 & ITF-14
IP Rating	IP20
Energy Rating	A* - (Very Low Energy)

Light Source

Rated Wattage	40W
Lumens	2000 UP - 2000 DOWN
Lumens Per Watt	100
Recommended Product Location	Interior Commercial / Offices
Light Source Brand	Osram LED Chips
Colour Temperature	4000K
CRI Ra	Ra > 80
Lifespan	50,000 Hours
Lamp Working Temperature	<50°C
Beam Angle	100° up 100° down
Photometric Data	Visit www.saturnled.eu for full Photometric files
Lamp Code	N/A

Electrical

Voltage	220-240V. 50 / 60Hz. AC.
Power Factor Correction (PFC)	>0.9
Cabling Electrical Connections	Screw fix in terminal block

Installation

Distance from Illuminated Object	0.5m
Method of Fix	Suspended mounted with a set of two single-wire suspensions.
Recommended Working Temperature	Minimum Temp -10°C to Maximum Temp + 40°C
Instruction Sheet	Supplied with product

Origin & Markets

Country of Manufacture Designed & tested in Europe - Manufactured in China

Intended Market Europe, Middle East & Australia 220 - 240Volt

Materials

Main Housing Material Aluminium Body

Approvals

Warranty 3 Year Warranty - For more information go to www.saturnled.eu/warranty

Marks & Symbols CE -- SELV -- RoHS -- EMC -- WEEE

Quality Assurance System SaturnLED quality assurance to ISO9001:2008

Certificate of Conformity Available on request - technical@saturnled.eu

Manufactured in Accordance to British Standard - BS EN 60598 - 2 - 1

Datasheet generated from <http://www.electrika.com> last updated Wednesday, February 21, 2018 10:32:00 AM

