



MILA1001

Milan 22W 1800LM 4000K IP65 White LED Bulkhead

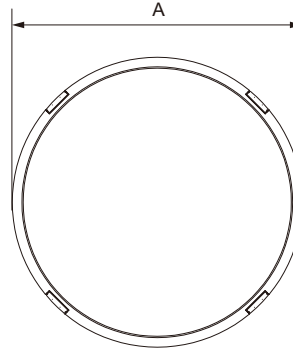

General Details

| | |
|---------------------------|---|
| Finish | White Polycarbonate Body & Clear Polycarbonate Diffuser |
| Product Weight | 1.6kg |
| Overall Dimensions | A 430mm X B 126mm |
| Bar Coding | Saturn LED coding in accordance with EAN-12 & ITF-14 |
| IP Rating | IP65 |
| Energy Rating | A* - (Very Low Energy) |
| Emergency | 3 hour - see www.saturnled.eu/warranty for more info |

Light Source

| | |
|---------------------------------|-----------------------|
| Wattage & Lumens | 22W - 1800M - 82 lm/W |
| Colour Temperature | 4000K |
| CRI Ra | Ra > 80 |
| Lifespan | 50,000 Hours |
| Lamp Working Temperature | <50°C |
| Beam Angle | 90° |



Electrical

| | |
|--------------------------------|-----------------------------|
| Voltage | 220-240V. 50 / 60Hz. AC. |
| Running Current (I) | 110mA |
| Total Running Wattage (W) | 22W |
| Electrical Classification | Class II |
| Power Factor Correction (PFC) | 0.9 |
| Cabling Electrical Connections | Screw fix in terminal block |
| LED Driver | Tridonic |

Installation

| | |
|---------------------------------|---|
| Method of Fix | Surface mounted on a suitable substrate. |
| Recommended Working Temperature | Minimum Temp -10°C to Maximum Temp + 40°C |
| Instruction Sheet | Supplied with product |

Origin & Markets

| | |
|------------------------|---|
| Country of Manufacture | Designed & tested in Europe - Manufactured in China |
| Intended Market | Europe, Middle East & Australia 220 - 240Volt |

Materials

| | |
|-----------------------|-------------------------------|
| Main Housing Material | Polycarbonate |
| Fixings Main Housing | Zinc plated screws (Internal) |
| Front Shield | Polycarbonate Opal Diffuser |

Approvals

| | |
|-------------------------------|---|
| Warranty | 5 Year Warranty - For more information go to www.saturnled.eu/warranty |
| Marks & Symbols | CE -- SELV -- RoHS -- EMC -- WEEE |
| Quality Assurance System | SaturnLED quality assurance to ISO9001:2008 |
| Manufactured in Accordance to | British Standard - BS EN 60598 - 2 - 1 |

