


## VIPER5W/SIL

Viper 5W 4000K IP65 LED Bulkhead Silver with Trims

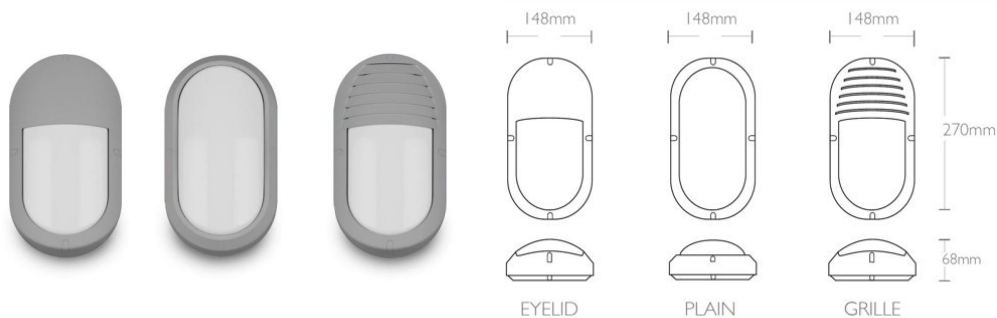

## General Details

<b>Finish</b>	Silver Polycarbonate Body c/w Opal Diffuser & Three Trims
<b>Product Weight</b>	0.51kg
<b>Overall Dimensions</b>	270mm X 148mm X 68mm
<b>Carton Weight / Material</b>	1.5 kg / Cardboard
<b>Packaging Sizes / Packed Weight</b>	Length 310mm, Height 120mm, Width 120mm
<b>Packaging &amp; Labelling Guidelines</b>	Saturn LED.eu - Generic labelling
<b>Bar Coding</b>	Saturn LED coding in accordance with EAN-12 & ITF-14
<b>IP Rating</b>	IP65
<b>Energy Rating</b>	A* - (Very Low Energy)

## Light Source

Rated Wattage	5W
Lumens	500
Lumens Per Watt	100
Recommended Product Location	Exterior / Interior Bulkhead Lighting
Light Source Brand	Epistar LED Chips
Colour Temperature	4000K
CRI Ra	Ra > 80
Lifespan	50,000 Hours
Lamp Working Temperature	<50°C
Beam Angle	115° & 95° & 95°
Photometric Data	Visit <a href="http://www.saturnled.eu">www.saturnled.eu</a> for full Photometric files
Lamp Code	N/A

## Electrical

Voltage	220-240V. 50 / 60Hz. AC.
Running Current (I)	45mA
Total Running Wattage (W)	5W
Electrical Classification	Class II
Power Factor Correction (PFC)	0.5
Cabling Electrical Connections	Screw fix in terminal block
LED Driver	Pri: 240V ac. Sec: 84mA Max DC 85V

# Installation

Distance from Illuminated Object	0.5m
Method of Fix	Surface mounted on a suitable substrate.
Recommended Working Temperature	Minimum Temp -10°C to Maximum Temp + 40°C
Instruction Sheet	Supplied with product

# Origin & Markets

Country of Manufacture	Designed & tested in Europe - Manufactured in China
Intended Market	Europe, Middle East & Australia 220 - 240Volt

# Materials

Main Housing Material	Polycarbonate
Fixings Main Housing	Zinc plated screws (Internal)
Front Shield	Polycarbonate Opal Diffuser

# Approvals

Warranty	5 Year Warranty - For more information go to <a href="http://www.saturnled.eu/warranty">www.saturnled.eu/warranty</a>
Marks & Symbols	CE -- SELV -- RoHS -- EMC -- WEEE
Quality Assurance System	SaturnLED quality assurance to ISO9001:2008
Certificate of Conformity	Available on request - <a href="mailto:technical@saturnled.eu">technical@saturnled.eu</a>
Manufactured in Accordance to	British Standard - BS EN 60598 - 2 - 1

Datasheet generated from <http://www.electrika.com> last updated Wednesday, February 21, 2018 10:32:02 AM